

INDUSTRIAL SIRENS & SOUNDERS

LONG RANGE SIRENS

SIRENCO H200


- ❖ Sound output 120 dB(A) at 1m
- ❖ Low penetrating tone
- ❖ Weatherproof

SPECIFICATIONS

VOLTAGE

Hand Operated

Sound Output:	120 dB(A) at 1m
Sound Frequency:	500Hz
Rating:	IP65
Construction:	Aluminium/cast iron
Dimensions(lxhxw):	420 x 360 x 770 mm
Weight:	12 Kg

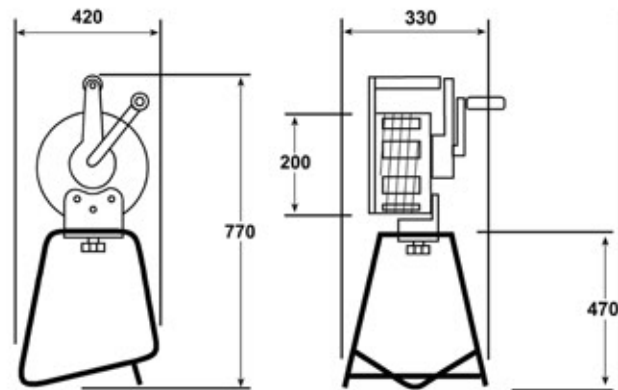

All Dimensions in mm

OVERVIEW

This cast aluminium siren is designed as a backup alarm when there is a power failure or applications in remote areas where no electricity is available, blasting sites etc. The handle on top of the siren can be selected to alter the sound output. This is a simple, maintenance free siren with a sealed gearbox.

DETAILED SPECIFICATIONS

VOLTAGE	Hand Operated
SOUND OUTPUT	120 dB(A) at 1m
SOUND FREQUENCY	500Hz
APP. RANGE	2000m in still air on open field
MOTOR	Sealed gearbox crank handle with ratchet
WEIGHT	12 Kg
PACKING DIMENSIONS	56 x 36 x 45 cm - 15Kg
MOUNTING	The unit is shipped with siren mounted upside down in the frame. Turning the hand nut loose allows you to mount the siren on top of the frame. Tighten the hand nut with siren in position. Holding the handle on top of the siren and with one foot on the bottom of the frame, the crank-handle can be turned to operate the siren.